


Millett


SCOPE MOUNT FEATURES & SPECIFICATIONS

Ring	A-Height	B-Height	C-Height	D-Height	E-Height	F-Height
1 IN	.145	.265	.395	.500	.265	.395
30mm	.206	.350	.495		.350	.495

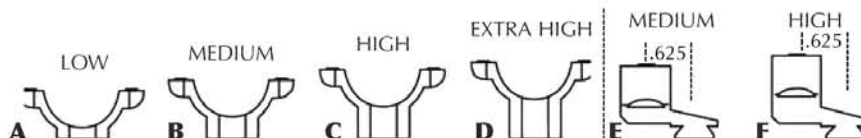

DETACHABLE MOUNT FEATURE & SPECIFICATIONS

Angle-Loc™	A-Height	B-Height	C-Height
Detachable 1 IN.	.115	.235	.470
Vertical Split 1 IN.	-	.220	-
Vertical Split 30 MM	-	.220	-

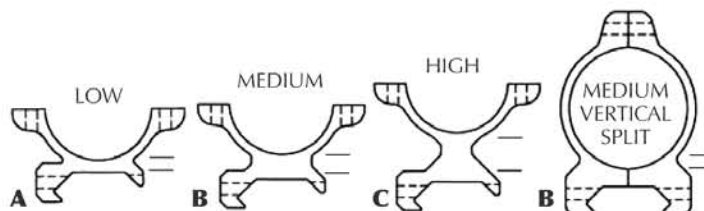

DETACHABLE MOUNT FEATURE & SPECIFICATIONS

Ring	A-Height	B-Height	C-Height	D-Height	E-Height	F-Height
Angle-Loc 1 IN.	.275	.395	.525	1.025	.395	.525
Angle-LoC 30 MM	.330	.477	.622	-	.477	.622
.22 CAL 1 IN.	.295	.420	.600	-	-	-
.22 CAL 30 MM	-	.429	-	-	-	-
RUGER M77 1 IN.	-	R-586 F-.473	R-.699 F-.586	-	-	-
RUGER M77 30 MM	-	R-.510 F-.397	R-.623 F-.510	-	-	-
SAKO 1 IN.	.412	.532	.662	-	.532	-
SAKO 30 MM	.347	.614	.759	-	-	-
TIKKA 1 IN.	.473	.586	.699	-	-	-
TIKKA 30 MM	.397	.510	.623	-	-	-
BRNO CZ, ZKM 1IN.	.473	.586	.699	-	-	-
BRNO CZ,ZKM 30MM	.397	.510	.623	-	-	-
BRNO ZKK 1 IN.	.493	.606	.719	-	-	-
BRNO ZKK 30 MM	.417	.530	.643	-	-	-

