




MOUNTING DIMENSIONS

All measurements are in millimeters. To convert to inches, divide by 25.4.

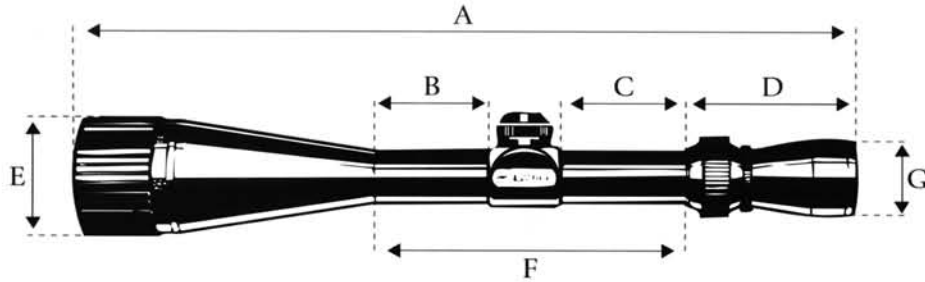

MASTER SERIES™ AETEC®

Scope	A	B	C	D	E	F	G
2.8 - 10 x 44	282.0	37.00	65.00	68.00	52.00	130.00	40.00
4 - 14 x 44 SF	324.0	69.00	76.00	69.00	51.90	174.00	40.00

MASTER SERIES™ PROHUNTER®

Scope	A	B	C	D	E	F	G
4 x 32 A/O	279.4	64.00	66.00	65.00	38.70	157.00	37.00
2 - 7 x 32	284.0	52.00	62.50	78.00	38.70	146.50	37.00
6 x 40	306.0	68.50	69.20	65.00	46.70	166.00	37.00
3 - 9 x 40	305.0	61.00	62.60	78.00	46.70	150.60	37.00
4 - 12 x 40 SF	327.0	52.00	75.50	78.00	46.70	156.00	37.00
6 - 18 x 40 SF	375.9	92.00	76.00	82.00	46.70	195.00	37.00
3 - 10 x 44	305.0	63.00	62.50	78.00	50.70	152.50	37.00
4 - 12 x 44 SF	330.2	64.00	76.00	82.00	50.70	167.00	37.00
4 - 14 x 44	330.2	64.00	76.00	82.00	50.70	167.00	37.00
6 - 21 x 44 SF	375.9	92.00	76.00	82.00	50.70	195.00	37.00
6 - 24 x 44 SF	375.9	92.00	76.00	82.00	50.70	195.00	37.00

PROHUNTER® HANDGUN SCOPES

Scope	A	B	C	D	E	F	G
2 x 20	213	74	50	55	25	154	36
4 x 32	228.5	42	50	55	38.5	122.5	36
2 - 6 x 32	233	45	32	70	40	108	36

MASTER SERIES™ PRODIAMOND®

Scope	A	B	C	D	E	F	G
1 x 20	215.9	64.00	66.00	65.00	25.40	157.00	38.00
2 x 32	228.6	64.00	66.00	65.00	38.70	157.00	38.00
4 x 32	237.0	52.50	53.50	64.50	38.70	134.00	38.00
1.5 - 5 x 20	254.0	48.00	62.00	80.00	25.40	137.00	36.75
1.5 - 5 x 32	254.0	38.00	62.00	80.00	38.70	127.00	36.75
1.5 - 5 x 32 Illum Reticle	254.0	38.00	62.00	80.00	38.70	127.00	36.75

MASTER SERIES™ PROSPORT®

Scope	A	B	C	D	E	F	G
2.5 x 20 Shotgun	228.6	64.00	66.00	65.00	25.40	157.00	38.00
1.5 - 5 x 32 Shotgun	228.6	38.00	62.00	82.00	38.70	127.00	36.75
4 x 32 Shotgun	241.3	64.00	66.00	65.00	38.70	157.00	38.00
4 x 32	279.0	64.50	63.50	65.80	38.70	155.00	37.00
3 - 9 x 32	305.0	80.00	64.30	76.60	38.70	171.00	37.00
3 - 9 x 40	305.0	62.00	63.00	78.00	46.70	151.00	37.00
4 - 12 x 40 A/O	306.0	62.00	62.50	78.00	48.50	152.00	37.00
3 - 9 x 50	304.8	45.00	62.50	78.00	56.70	134.50	37.00
4 - 12 x 50 A/O	330.2	45.00	62.00	82.00	61.70	134.00	36.75
6 - 18 x 50 A/O	375.9	92.00	76.00	82.00	61.70	195.00	36.75



MASTER SERIES™ CROSSBOW

Scope	A	B	C	D	E	F	G
4 x 32	237.0	52.50	53.50	64.50	38.70	134.00	38.00
4 x 32 A/O	241.3	64.00	66.00	65.00	38.70	157.00	38.00

22 MAG®

Scope	A	B	C	D	E	F	G
4 x 32	278.0	63.50	63.50	65.50	38.70	155.00	37.00
3 - 9 x 32	304.8	78.50	61.00	78.80	38.70	169.00	37.00
3 - 9 x 32 A/O	304.8	80.00	62.00	82.00	43.70	169.00	36.75

BLAZER™

Scope	A	B	C	D	E	F	G
4 x 32	278.0	63.50	63.50	65.50	38.70	155.00	37.00
3 - 9 x 32	304.8	78.50	61.00	78.80	38.70	169.00	37.00
3 - 9 x 40	304.8	58.50	61.00	77.50	46.50	149.00	37.00
3 - 9 x 50	304.8	46.00	60.50	78.00	56.70	135.50	37.00

RED DOT

Scope	A	B	C	D	E	F	G
30mm Objective	DOES NOT APPLY, MOUNTING RAILS ARE FIXED IN POSITION CANNOT BE REMOVED						
42mm Objective	DOES NOT APPLY, MOUNTING RAILS ARE FIXED IN POSITION CANNOT BE REMOVED						
30mm Tube	133	39	30	10	30	123	32.4

RIMFIRE

Scope	A	B	C	D	E	F	G
4 x 15	270	113	60	68	19	202	25
4 x 20	270	65.5	58.5	68	25	155	25
3 - 7 x 20	290	63.5	52.2	96.3	25.6	145	25

ATTACHING MOUNT, RINGS & SCOPE TO YOUR RIFLE

BEFORE BEGINNING THE MOUNTING PROCEDURE, BE SURE THE ACTION IS OPEN, THE CLIP OR MAGAZINE IS REMOVED AND THE CHAMBER IS CLEAR. DO NOT ATTEMPT ANY WORK UNTIL YOUR FIREARM HAS BEEN CLEARED AND DETERMINED TO BE SAFE.


In mounting your scope, we recommend that you DO NOT take short cuts as it may lead to damage to either the mounting system or to the scope. Each mounting system will have its own instructions to follow, and it is best to read the instructions first to be sure you understand them and have the necessary tools on hand.

We further recommend that you plan to go through the mounting procedure twice. The first time, to be sure everything fits together and functions properly. On the first run through, please keep the following in mind.


1. Before attaching the base, clean the mounting holes in the receiver and the threads of the attaching screws with acetone or any good solvent to free them of oil or grease.
2. If the mount manufacturer has recommended the use of a thread adhesive, do not use it on the first mounting trial. Once the adhesive has set, it is difficult to demount if anything needs correction.
3. Be sure the mounting screws do not protrude into the receiver or the barrel.
4. When using dovetail mounts, do not use the scope as a lever when installing the scope. The initial resistance to turning may cause damage to the scope, and is not covered by the warranty. We recommend using a 1" wooden dowel or metal cylinder to seat the rings.
5. Be sure the position of the scope does not interfere with the operation of the action.
6. Be sure there is at least 1/8" of clearance between the edges of the rings and any protruding surfaces such as the turret housing (saddle), power selecting ring, and the flare of the objective bell. Also be sure there is 1/8" of clearance between the objective bell and the barrel.
7. You should test position the scope for the proper eye relief. The scope rings should be left loose enough so that the scope will slide easily. Variable power scopes should be set at the highest magnification when performing this procedure. Mount the rifle and look through the scope in your normal shooting position.
8. Test position the rifle for proper cheek weld a number of times to ensure that your scope is positioned properly.
9. When you are satisfied that everything is okay, demount and start again. This time, seat all screws firmly.



Truplex Reticle




Illuminated Truplex Reticle




ProDiamond™ Reticle



Illuminated ProDiamond™ Reticle



Crossbow Reticle



MilDot Reticle



Smart™ Rangefinding Reticle